




PROFESSIONAL POLYURETHANE 550 VOC WOOD FLOOR FINISH

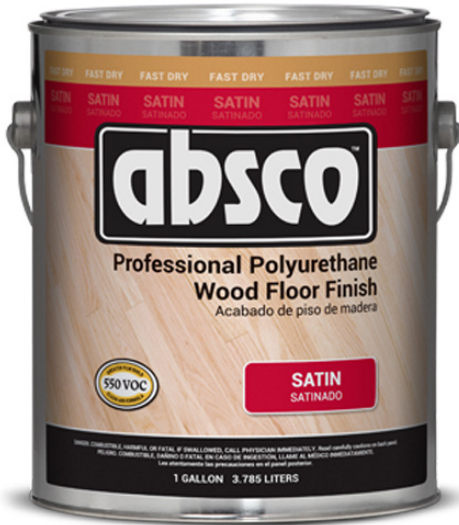

SPECIFICATIONS:

VOC.....	< 550 g/L
Solids.....	40%
Flash Point.....	< 105°F (< 41°C)
Solvent	Mineral Spirits
Viscosity Zahn Cup #3	13(s)
Odor.....	Solvent Like
Coverage.....	500 - 600 sq. ft/gal
Dry Time:.....	3-5 Hours
Color (Wet).....	Dark Amber
Color (Dry).....	Amber Clear
Sheens.....	Super High Gloss, Semi-Gloss, Satin
Sizes.....	1g & 5g Containers

FEATURES

- Great Coverage & Low Odor
- Beautifies and Protects
- Fast Drying 550 VOC Formulation
- High Solids
- Commercial and Residential Use

PROFESSIONAL POLYURETHANE GREAT FOR ALL HARDWOODS

Absco Professional Polyurethane Wood Floor Finish makes it easy, with great coverage, easy application and multiple VOC formulations. Its oil-modified high solids formulation is durable, self-leveling and is formulated for beauty and protection. And this fast drying 550 VOC formula is designed for residential and commercial use.

Please refer to the product label for specific surface preparation and application instructions.



THIS IS **CANLAK COATINGS**

To find out more about our innovative line of coatings, visit canlakcoatings.com or call us at **800-432-4333**.